




ULTIMATE
Visual Solutions

**THE ULTIMATE VISUAL SOLUTIONS
FOR ALL REQUIREMENTS.**

WBC40 LUCIDITY

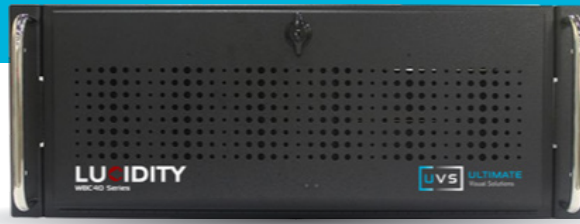

Lucidity WBC40 Video Wall Controller Specifications

Processor	I7-9700 3GHz Eight Core
Chipset	Z390
RAM	16GB DDR4
Storage	RAID1 SSD 240GB Hot Swappable
Ethernet	2x 10/100/1000 Gbps
Power Supply	600W RPSU / 100-240V 50-60Hz
OS	Windows 10 LTSC 2019
Card Capacity	4 slots
Rack Profile	4U
Dimensions	430 x 546 x 176mm
Output Cards *	* not all input cards are compatible with all output cards please contact UVS for your config
MHDMI4OUT/MDP4OUT	4x HDMI or Display Port @ 4096x2160 60Hz HDMI or Display Port to be confirmed with order
DP4OUTQP2	4x Display Port (With DVI Adapters) 4x 4096x2160 @ 120Hz 4x 5120x2880 @ 60Hz
Input Cards *	* not all input cards are compatible with all output cards please contact UVS for your config
MN4HDMI	4x Mini HDMI 3840x2160@30HZ – mini HDMI to HDMI adapters provided
IN4HD16IP	4x Mini HDMI 3840x2160@30Hz / up to 16x HD IP streams – shared resource e.g. 4x HDMI + 12x HD IP RTSP H264 streams
IN4HD16IPENC (with Encoding)	4x Mini HDMI 3840x2160@30Hz / up to 16x HD IP streams. With encoding. Encoding uses same resources as the decoding so if encoding 2xHD and 4x Inputs then only 10x Decodes allowed
YN4HDMI	4x HDMI @1920x1200 at 60Hz * max. 3 cards per system

Note: Specifications subject to change

UVS provide turnkey solutions for all types of audio visual and visual display applications. Our projects range from a single display screen in a conference room to a multi-screen video wall system within a 24/7, mission- critical operation such as a Data Centre or Special Operations Room.